



**PROSTAFF**



**FOR EVERY HUNT  
THERE'S A  
PROSTAFF P3**





#### QUICK FOCUS EYEPIECE

Smooth-turn aluminum ring with rubberized eye guard allows crisp reticle focus and quick target acquisition.



#### SPRING-LOADED INSTANT ZERO-RESET TURRETS

Spring-loaded Windage and Elevation knobs can be reset to "zero" after sighting-in for easy reference when making field adjustments.

#### FULLY MULTICOATED OPTICS

Multiple layers of anti-reflective coating on all air-to-glass surfaces maximize light transmission, brightness and contrast.



#### GENEROUS, CONSISTENT EYE RELIEF

Keeps your brow safe.



#### 3x ZOOM RATIO

Offers flexibility for a variety of hunting situations.



#### WATERPROOF

O-ring sealed to prevent moisture from entering body.



#### SHOCKPROOF

Shrugs off hard recoil and rugged use.



#### NITROGEN PURGED

Purged using nitrogen gas for total reliability against thermal shock and internal fogging.



#### ONE-INCH TUBE

Indicates One-Inch diameter main body tube.



#### ALUMINUM TURRET CAPS

PROSTAFF P3 features aluminum construction for enhanced durability. Turret caps, zoom ring and eyepiece focus share ergonomic knurling design.




#### SPRING-LOADED INSTANT ZERO-RESET TURRETS

Precise, positive-click 1/4-MOA reticle adjustments to get you zeroed quickly and maintain your setting, even with heavy recoil.

#### PROSTAFF P3 RETICLES

The new PROSTAFF P3 line offers models with the popular BDC or Duplex reticles.

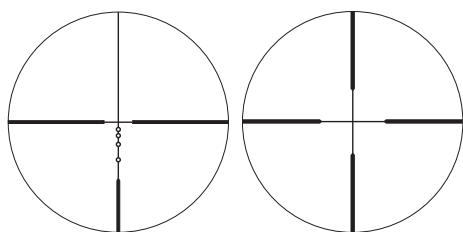

BDC

DUPLEX



MODEL	2-7x32	3-9x40	3-9x50	4-12x40	6-18x40AO
RETICLE	BDC	DUPLEX/ BDC	DUPLEX/ BDC	DUPLEX/ BDC	BDC
ACTUAL MAGNIFICATION	2x-7x	3x-9x	3x-9x	4x-12x	6x-18x
EFFECTIVE OBJECTIVE DIAMETER (mm)	32	40	50	40	40
OBJECTIVE OUTER DIAMETER (mm)	40.8	48.8	60.3	48.8	50.8
EYEPIECE OUTER DIAMETER (mm)	44	44	44	44	44
FILTER SCREW DIAMETER	M35.5x0.5	M43x0.75	M55x0.75	M43x0.75	N/A
EXIT PUPIL (mm)	16.0-4.6	13.3-4.4	16.7-5.6	10.0-3.3	6.7-2.2
EYE RELIEF (mm)	96.5-96.5	91.5-91.5	91.5-91.5	94.0-94.0	90.0-90.0
FOV (m@100m)	14.9-4.2	11.2-3.8	11.2-3.8	7.9-2.6	5.2-1.7
TUBE DIAMETER (mm)	25.4	25.4	25.4	25.4	25.4
ADJUSTMENT GRADUATION	1 click: 1/4 MOA 1 revolution: 12 MOA	1 click: 1/4 MOA 1 revolution: 12 MOA	1 click: 1/4 MOA 1 revolution: 12 MOA	1 click: 1/4 MOA 1 revolution: 12 MOA	1 click: 1/4 MOA 1 revolution: 12 MOA
MAX. INTERNAL ADJUSTMENT (STRAIGHT)	90 MOA	75 MOA	75 MOA	55 MOA	35 MOA
PARALLAX SETTING (m)	91.4	91.4	91.4	91.4	45.7-∞
LENGTH (mm)	292	315	318	358	371
WEIGHT (g)	405	425	505	440	505

PROSTAFF



Nikon Europe B.V.  
Tripolis 100, Burgerweeshuispad 101  
1076ER Amsterdam, The Netherlands  
www.europe-nikon.com

Nikon Vision CO., LTD.  
Nikon Futaba Bldg., 3-25, Futaba 1-chome  
Shinagawa-ku, Tokyo 142-0043, Japan  
www.nikon.com/sportoptics



All Nikon Trademarks are the property of Nikon Corporation. Features and specifications are subject to change without notice.